


PW1C

FRONT LOADING WAREWASHER
C/W HEAT RECOVERY UNIT



STANDARD FEATURES

- Integrated Heat Recovery Unit
- No external extraction canopy required*
- Recycles energy from steam to heat incoming water
- 2, 4 and 6 minute cycles
- Touchscreen controls
- Front loading chamber with W720 x D600 x H750 capacity
- Adjustable rail & tine bar, which holds upto 8 trays (18" - 1/1GN)
- 2.0HP wash pump
- Dual chemical pumps
- Assured rinse including booster pump
- Hands-free drainage system with sump and drain pump
- Two-stage stainless steel wash and drain filtration
- Heavy-duty stainless-steel construction, manifold and arms
- 2x 500mm dish rack (600 70028)
- 1x 500mm cup rack (600 70029)
- 1x cutlery container (C660503) 1x supplied connection kit (water, drain and chemical hoses) (no plug or lead)

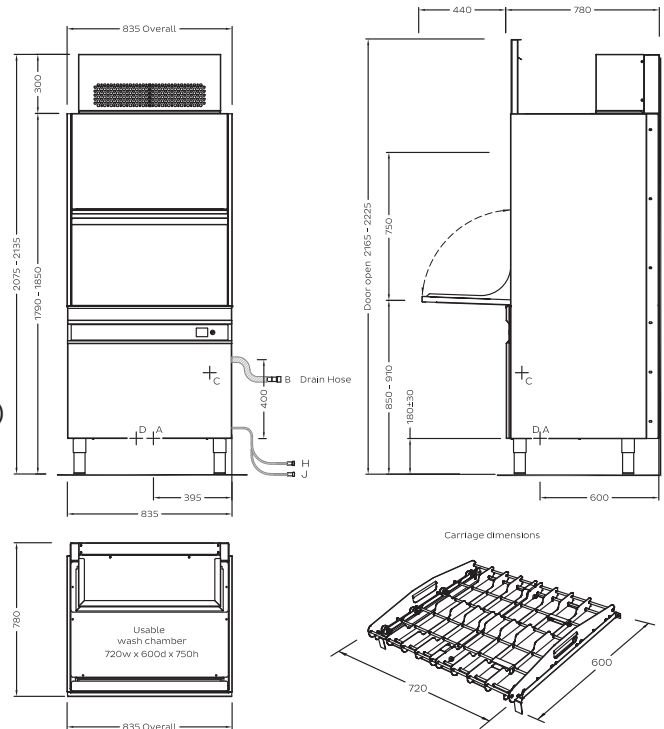

SPECIFICATIONS

A - Hot Water (fill only)	Temperature 65°C
D - Cold Water	Temperature <25°C
Connection	3/4" male, hose supplied
Pressure	100-500kPa**
Flow	10L per minute
Backflow prevention	Atmospheric vacuum breaker
Consumption	2.4L per cycle

B - Drainage

Drain pump flexi-hose	25mm
-----------------------	------

C - Electrical	V	Hz	A/ph	Max kW
Three phase	400 - 415	50	15	10.50
Three phase	400 - 415	50	25	18.00

Dimensions

Width (mm)	835
Depth (mm)	780
Height (mm)	2075
Weight (kg)	186
Volume (m3)	1.8

Water Quality

	Min	Max
pH	7	8
TDS (ppm)	1	135
Hardness		100
Cl-		100
SO4		400
Fe		0.1
Cl2		0.

*Subject to adequate general ventilation. Full details and certification from SEED available on request.

**Suitable for connection to low flow water supplies.
Isolating switch must be within 1m of, and not directly behind, the machine
Refer to operator manual for installation instructions

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.