

## XM

Economy Compact Passthrough Dishwasher – 450mm rack  
**W 655mm x D 660mm x H 1530mm**

The Washtech XM is a simple-to-use and easy-to-maintain passthrough dishwasher. It's compact footprint fits neatly into a 510mm benchgap with 600mm deep benching. With one of the industry's lowest water consumption rates, the XM is highly productive, economical to operate and light on the environment.

The XM features Washtech hybrid controls which combine IP65 stainless switches and tried-and-tested switchgear with a customisable electronic timer. In addition it is equipped with a heavy duty stainless steel wash manifold.

Since 1981 Washtech dishwashers have been constructed from heavy-duty stainless steel, and are engineered specifically for Australian conditions and regulations. Backed by the most extensive service network and spare parts inventory in the region, your Washtech XM will not let you down.

### Standard Features

- 60, 120 and 180 second cycles – autostart upon hood closure
- Capacity of up to 960 glasses / 840 plates per hour
- Low hot water consumption of 2.2 litres per cycle
- Heavy-duty stainless steel construction and wash manifold
- Washtech hybrid controls
- Quick connection including:
  - Water supply hose
  - Detergent and rinse aid pumps with injector lines
  - Drain pump with outlet hose
  - 15 amp plugset
- Watermark approved backflow prevention
- Moffat's comprehensive 5-2-1 Warranty

### Includes:

- 2 x 450mm dish rack (600 70081)
- 1 x 450mm cup rack (600 70080)
- 1 x cutlery container (C660503)



## XM



moffat.com.au  
washtech.com.au

### Moffat Pty Limited

#### VIC/TAS/SA

70 Springvale Road  
Mulgrave, Victoria 3170  
Telephone 03-9518 3888  
Fax 03-9518 3833  
vsales@moffat.com.au

#### NSW

Telephone 02-8833 4111  
nswsales@moffat.com.au

#### QLD



Telephone 07-3630 8600  
qldsales@moffat.com.au

#### WA




Telephone 08-9413 2400  
wasales@moffat.com.au

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd  
Version: WXM0030 2104

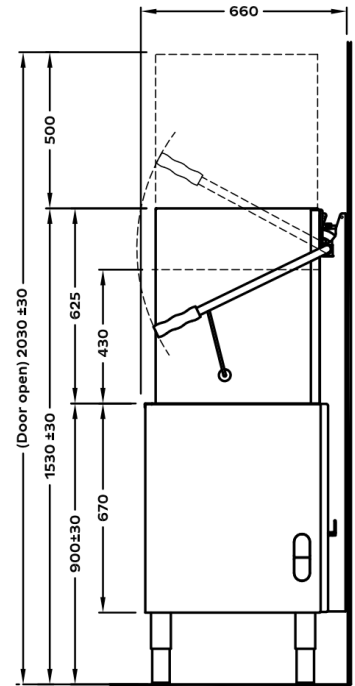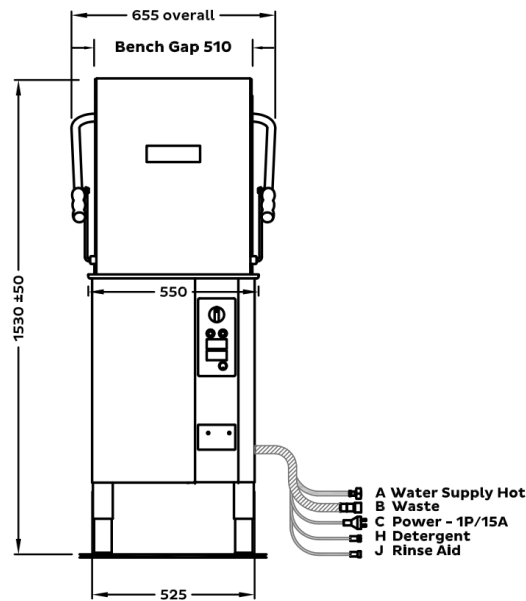

#### Bench detail



#### A - Hot Water

Temperature 65°C  
Connection 3/4" male; hose supplied  
Pressure 200-350kPa  
Flow 20 litres per min  
Quality Potable - refer table  
Backflow Prevention AVB  
Consumption 2.2 litres per cycle\*

#### B - Waste - Pumped Drain

Connection Hose supplied for 38mm open standpipe 750mm high or connection to sink trap

C - Electrical	V	Hz	A/phase	Max kW
Single Phase	230	50	15	3.37

#### Dimensions

	Machine	Packed
Width (mm)	655	685
Depth (mm)	660	710
Height (mm)	1530	1450
Weight (kg)	73	94
Volume (m <sup>3</sup> )		0.71

#### Water Quality

	Min	Max
pH	7	8
Hardness (ppm)	20	100
Cl <sup>-</sup>		100
SO <sub>4</sub>		400
Fe		0.1
Mn		0.5
Cu		0.05
Cl <sub>2</sub>		0.1

#### Corner Installation Notes

- Machine must face left for easy access to controls
- Allow 300 clearance to front for service access
- Splashback return must be no higher than 150mm

\* Water consumption rates may vary based on site conditions.

Isolating switch must be within 1m of, and not directly behind the machine.

Refer to operator manual for installation instructions.



an Ali Group Company

