

XV

COMPACT UNDERCOUNTER DISHWASHER

WASHTECH®






STANDARD FEATURES

- 1 and 2 minute dishwashing cycles
- 2.2L per cycle water consumption
- Compatible with 365mm to 450mm racks
- Washes up to 960 dishes per hour
- Washtech hybrid controls
- Hands-free auto-drain
- 0.5HP wash pump
- Dual chemical pumps
- Drain pump
- Stainless steel wash and drain filter

Includes

- 1x 450mm dish rack (600 70081)
- 1x 450mm cup rack (600 70080)
- 1x cutlery container (C660503)
- Quick connection kit (all hoses and 15A plugset)

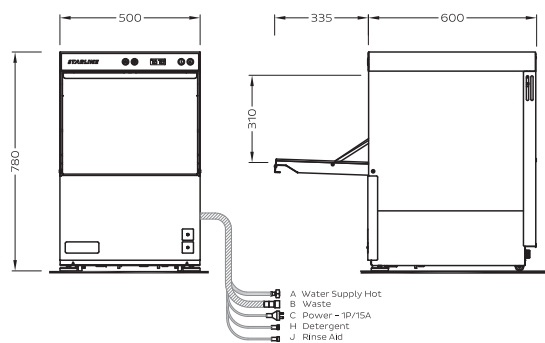

SPECIFICATIONS

A - Hot Water

Temperature	65°C
Connection	3/4" male, hose supplied
Pressure	200-350kPa
Flow	20L per minute
Backflow prevention	Atmospheric vacuum breaker
Consumption	2.2L per cycle*

D - Drainage

Drain pump flexi-hose	25mm
-----------------------	------

C - Electrical

Single phase	V	Hz	A/ph	Max kW
	230-240	50	15	3.37

Dimensions

Width (mm)	Machine	Packed
Depth (mm)	500	560
Height (mm)	600	650
Weight (kg)	780	915
Volume (m3)	47	57
		0.33

Water Quality

	Min	Max
pH	7	8
Hardness	20	100
Cl-		100
SO4		400
Fe		0.1
Mn		0.5
Cu		0.05
Cl2		0.1

*Water consumption rates may vary based on site conditions
 Isolating switch must be within 1m of, and not directly behind, the machine
 Refer to operator manual for installation instructions

In line with policy to continually develop and improve its products,
 Washtech reserves the right to change specifications and design without
 notice.



moffat.com.au | 1300 269 801

Manufactured in New Zealand by Washtech Limited - Distributed in Australia by Moffat PTY Limited
 © Copyright Washtech Limited / Washtech XV Series-2 / WXV0040 / Jan-24

an Ali Group Company



the spirit of excellence