

Technical data sheet for

Icematic Ice Flaker - Self Contained SF95C



SF95C



SF95C

SPECIFICATIONS

Dimensions

Width: 500mm
 Depth: 597mm
 Height: 694mm

Nett weight

50kg

Packed weight

57kg

Water consumption

Air cooled condensing unit: 2.5 litres per hour

Electrical rating

220-240V, 1P+N+E, 50Hz
 Compressor power rating 346W
 Total absorbed power 410W,
 10A cordset fitted

Refrigerant type

R290



Installation distance from wall

Rear 150mm
 Right 150mm
 Left 150mm

Placement of unit should be indoors in an environment that does not exceed the air and water temperature limitations of the unit

Water connection requirements

Inlet connection: R 3/4"
 Cold water (5-35°C)
 Pressure (1-5 bar)
 Water outlet connection: Ø 20mm

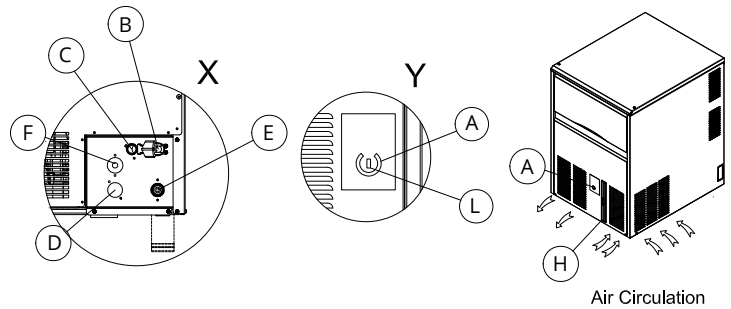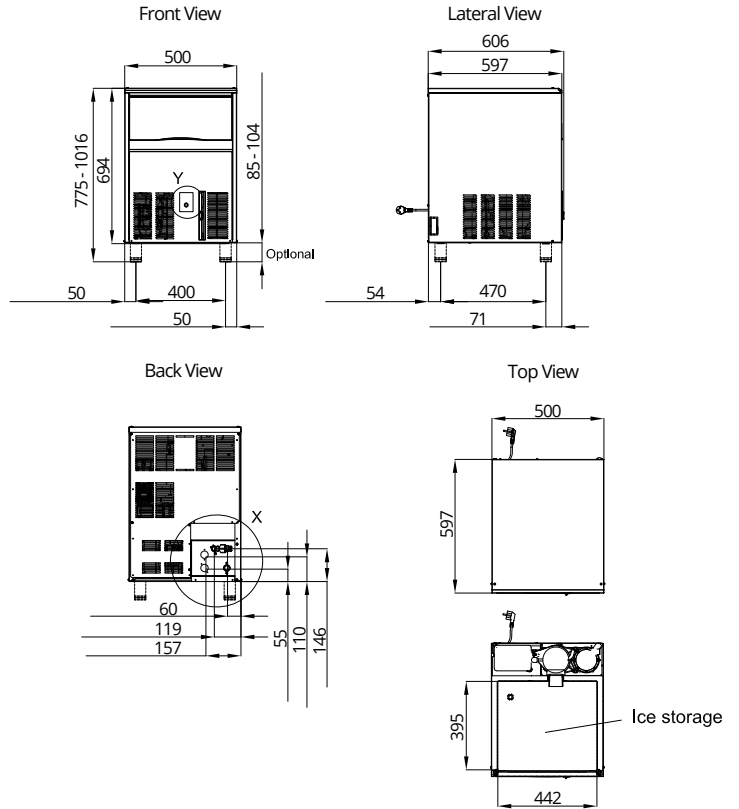

New Zealand moffat.co.nz

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.



- A. Switch Touch START-STANDBY
- B. Electrical cable supply
- C. Water outlet connection Ø 20mm
- D. Water outlet connection water condensation Ø 20mm
- E. Water inlet connection - 3/4" gas
- F. Water inlet connection water condensation 3/4" gas OPTIONAL
- H. Air Filter
- L. Led white-red regulatiome humidity ice and set T° storage probe

Ice production per 24 hours
 Water temperature

Ambient temperature	°C	32°	21°	15°	10°	
10°		76	84	88	94	kg
21°		50	71	75	77	kg
32°		50	58	62	64	kg
38°		48	54	56	58	kg

© Copyright Moffat Ltd NZ.ICE01.2024

an Ali Group Company



The Spirit of Excellence