

Waldorf[®] 800 SERIES

Installation and Operation Manual

Induction Cooktop

IN8200E INL8200E INB8200E INLB8200E
IN8400E INL8400E INB8400E INLB8400E



Date Purchased

Serial Number

Dealer

Service Provider



For use in GB & IE

MANUFACTURED BY

Moffat Limited

Rolleston 7675
New Zealand

INTERNATIONAL CONTACTS

AUSTRALIA

Moffat Pty Limited

E.Mail: vsales@moffat.com.au
Main Office: (tel): +61 (03) 9518 3888
(fax): +61 (03) 9518 3838
Service: (tel): 1800 622 216
Spares: (tel): 1800 337 963
Customer Service: (tel): 1800 335 315
(fax): 1800 350 281

CANADA

Serve Canada

Web: www.servecanada.com
E.Mail: info@servecanada.com
Sales: (tel): 800 551 8795 (Toll Free)
Service: (tel): 800 263 1455 (Toll Free)

NEW ZEALAND

Moffat Limited

Web: www.moffat.co.nz
E.Mail: sales@moffat.co.nz
Main Office: (tel): 0800 663328

UNITED KINGDOM

Blue Seal

Web: www.blue-seal.co.uk
E.Mail: sales@blue-seal.co.uk
Sales: (tel): +44 121 327 5575
(fax): +44 121 327 9711
Spares: (tel): +44 121 322 6640
(fax): +44 121 327 9201
Service: (tel): +44 121 322 6644
(fax): +44 121 327 6257

UNITED STATES

Moffat

Web: www.moffat.com
Sales: (tel): 800 551 8795 (Toll Free)
(tel): +1 336 661 1556
(fax): +1 336 661 9546
Service: (tel): 800 858 4477 (Toll Free)
(tel): +1 366 661 1556
(fax): +1 336 661 1660

REST OF WORLD

Moffat Limited

Web: www.moffat.co.nz
E.Mail: export@moffat.co.nz

The reproduction or copying of any part of this manual by any means whatsoever is strictly forbidden unless authorized previously in writing by the manufacturer.

In line with policy to continually develop and improve its products, Moffat Ltd. reserves the right to change the specifications and design without prior notice.

© Copyright Moffat Ltd. November 2014.

Waldorf Electric Cooktops

IN(L)(B)8200E Induction Cooktop.

IN(L)(B)8400E Induction Cooktop.

Introduction	2
Specification	4
Model Numbers Covered in this Specification	
General	
Technical Data	
Electrical Supply Requirements	
Electrical Connection	
Dimensions	6
Installation	7
Installation Requirements	
Unpacking	
Location	
Clearances	
Assembly	
Electrical Connection	
Commissioning	
Operation	10
Operation Guide	
Description of Controls	
Operating the Cooktops	
Cleaning and Maintenance	12
General	
After Each Use	
Daily Cleaning	
Weekly Cleaning	
Monthly Filter Cleaning	
Periodic Maintenance	
Fault Finding	14
Error Codes	
General Fault Messages (E1)	
Wiring Schematics	16
Replacement Parts List	18

Introduction

We are confident that you will be delighted with your WALDORF INDUCTION COOKTOP, and it will become a most valued appliance in your commercial kitchen.

To ensure you receive the utmost benefit from your new WALDORF Appliance, there are two important things you can do.

Firstly:

Please read the instruction book carefully and follow the directions given. The time taken will be well spent.

Secondly:

If you are unsure of any aspect of the installation, instructions or performance of your appliance, contact your WALDORF dealer promptly. In many cases a phone call could answer your question.

CE Only:

These instructions are only valid if the country code appears on the appliance. If the code does not appear on the appliance, refer to the supplier of this appliance to obtain the technical instructions for adapting the appliance to the conditions for use in that country.

WARNING:

INDUCTION HEAT SOURCE - CARE MUST BE TAKEN TO ENSURE THAT THE SPLASHBACK AND SURROUNDING AREAS ARE KEPT FREE OF METALLIC OBJECTS.

WARNING:

IMPROPER INSTALLATION, ADJUSTMENT, ALTERATION, SERVICE OR MAINTENANCE CAN CAUSE PROPERTY DAMAGE, INJURY OR DEATH. READ THE INSTALLATION, OPERATING AND MAINTENANCE INSTRUCTIONS THOROUGHLY BEFORE INSTALLING OR SERVICING THIS APPLIANCE.

WARNING:

GREAT CARE MUST BE TAKEN BY THE OPERATOR TO USE THE EQUIPMENT SAFELY TO GUARD IT AGAINST RISK OF FIRE.

- **THE APPLIANCE MUST NOT BE LEFT ON UNATTENDED.**
- **IT IS RECOMMENDED THAT A REGULAR INSPECTION IS MADE BY A COMPETENT SERVICEMAN TO ENSURE CORRECT AND SAFE OPERATION OF YOUR APPLIANCE IS MAINTAINED.**
- **DO NOT STORE OR USE GASOLINE OR OTHER FLAMMABLE VAPOURS OR LIQUIDS IN THE VICINITY OF THIS OR ANY OTHER APPLIANCE.**
- **DO NOT SPRAY AEROSOLS IN THE VICINITY OF THIS APPLIANCE WHILE IT IS IN OPERATION.**

CAUTION:

This appliance is;

- **For professional use and is only to be used by suitably qualified / trained persons.**
- **Only service persons trained or recommended by the manufacturer are to carry out installation, servicing and repair operations.**
- **Components having adjustments protected (e.g. paint sealed) by the manufacturer should not be adjusted by the user / operator.**

Safety Information:

For your safety, please pay attention to the following symbols marked on the appliance.

- RISK OF ELECTRIC SHOCK.



NO USER SERVICEABLE PARTS INSIDE.
QUALIFIED SERVICE PERSON ACCESS ONLY.
DISCONNECT FROM POWER BEFORE SERVICING.



NON-IONISING ELECTROMAGNETIC RADIATION
QUALIFIED SERVICE PERSON ACCESS ONLY.
DISCONNECT FROM POWER BEFORE SERVICING.

Please Note the Following Points:-

- Do Not placed metallic objects such as kitchen utensils, cutlery etc, on the Cooktop surface within the cooking zones as they could become hot.
- Take care when operating the appliance, as rings, watches and similar objects worn by the user could get hot when in close proximity to the Cooktop surface.
- Only use pans of the type and size suitable for induction cooking.

NOTE: Users with Heart Pacemakers fitted should consult with their doctor or the manufacturer before using this appliance.

Operation:

- Never insert objects into the Induction Unit. Inside are highly dangerous voltages. Do Not damage the Generator Inductors, e.g. with pointed / sharp objects as this may lead to electric shock.
- This Induction Unit is only for commercial cooking and for indoor use. It is only to be used with induction capable cookware. Any other use may result in unexpected hazards.
- Only use Induction Capable Cookware with a base of at least 120 mm diameter.
- Do not place metal objects, e.g. kitchen utensils, cutlery, tools, jewelry etc, on the cooking surface as they will quickly heat up if the appliance is turned 'On'.
- Beware that when using the induction unit, personal items such as rings, watches and similar objects could get hot when in close proximity to the cooking zone.
- Do Not place Aluminium Foil on the cooking zone.
- Do Not use the ceramic glass surface as a work top.
- Do not damage the cooking surface. If the cooking surface shows visible signs of cracking, the appliance must be immediately disconnected from the mains supply.
- Switch 'Off' the cooking zone after use. Do not rely on the Pan Detection Mode.

Personnel:

- Employees, visitors and contract personnel must be informed of the potential hazards for persons with pacemakers or metal implants. These persons must consult their doctor or the appliance manufacturer.

Maintenance and Repair:

- Maintenance and repair work is only to be undertaken by service persons trained or recommended by the manufacturer.
- Disconnect the electrical supply before removing the Induction Unit.
- Defective or damaged Induction Units are not to be installed, these should be returned to the manufacturer for repair.
- For safety reasons, only used recommended original spare parts and accessories.
- Dispose of appliance in accordance with national and regional regulations.

Emergency:

- Immediately switch 'Off' appliance and disconnect from the mains supply.

Fire:

- Burning appliances should only be extinguished with a Carbon Dioxide (CO₂) extinguisher. *Never use water or powder type extinguishers.*

Specifications

Model Numbers Covered in this Specification

- IN[1]8200E Induction Cooktop (450 wide) - 2 Induction Heat Zones.
IN[1]8400E Induction Cooktop (900 wide) - 4 Induction Heat Zones.

NOTE:

- [1]: - Model Options;
- - Standard Models.
 - L - Low Back Models.
 - B - Bold Front.
 - LB - Low Back and Bold Front.

General

A commercial heavy duty, high efficiency Induction Cooktop for modular kitchens, constructed in easy clean stainless steel external finish. It has a high option Cooktop arrangement with either 2 or 4 Induction Heat Zone option. Can be supplied with either Standard or Low Back Option and is available on industrial adjustable feet or with rear roller assembly.

Induction generators are the result of intensive research and development work. In addition to their high safety standard, they offer easy operation, the latest technology and maximum convenience for:-

- **Boiling.**
- **Roasting.**
- **Keeping Food Warm.**
- **Flambéing.**
- **Grilling.**

The pan bottom is heated directly with a minimum of energy loss, without having to heat a hotplate needlessly. The food is heated more rapidly, allowing set meals to be prepared in a shorter time, with greater convenience and efficiency.

A pan detection feature ensures that no energy is flowing when there is no pan (eliminating any fire hazard).

A temperature sensor monitors the pan to prevent the pan boiling dry (no liquid in the pan), and switches 'Off' the cooking zone immediately in the event of over heating.

Maximum efficiency is only obtained when induction- capable pans and pots are used.

Technical Data



Minimal Pan Diameter 120 mm.



Relative Humidity 10% to 90% Non-condensing.



Ambient Temperature:
 Operation 0°C to +40°C.
 Storage -20°C to +70°C.



Supply Voltage: According to the Technical Data Plate.
Voltage Tolerance: -10% to +6%.
Supply Frequency: 50 or 60 Hz.
Operating Frequency: 18 to 22 kHz.

Electrical Supply Requirements

Model	Power Supply			Total Power Input	Amps		
	Voltage	Type	Frequency		L1	L2	L3
IN8200E	400-415 Vac	3P+E	50 / 60 Hz	10 kW	16	16	16
IN8400E	400-415 Vac	3P+E	50 / 60 Hz	20 kW	32	32	32

Electrical Connection

WARNING:

THIS APPLIANCE MUST BE EARTHED. IF THE SUPPLY CORD IS DAMAGED, IT MUST BE REPLACED BY A SUITABLY QUALIFIED PERSON IN ORDER TO AVOID A HAZARD.

The electrical supply connection point is located at the rear of the appliance, approximately 130 mm from the right hand side and 48 mm from the rear of the appliance and 614 mm from the floor.

When connecting a this electric appliance to the mains supply, ensure that the following is carried out:-



- An isolating switch is fitted within 2 m of the appliance, but not on the appliance and in such a position that the user does not have to reach across the cooking surface.
- Supply cord shall be oil-resistant, sheathed flexible cable and not lighter than ordinary polychloroprene or other equivalent synthetic elastomer sheathed cord (as per AS/NZS 3191 part 2.10.11. or IEC 60245-IEC-57) e.g. HO5 RN-F Type.
- The branch supply line shall be individually overload protected to the correct current rating and the supply cord shall be protected against any mechanical or thermal damage.
- A grommet is fitted around the wiring entry hole into the appliance.
- All wiring connections must be tight.

Refer to the appropriate wiring standards for the size of cable that is to be supplied to an appliance for the current drawn on that line.



Dimensions

Dimensions

IN(L)8200E

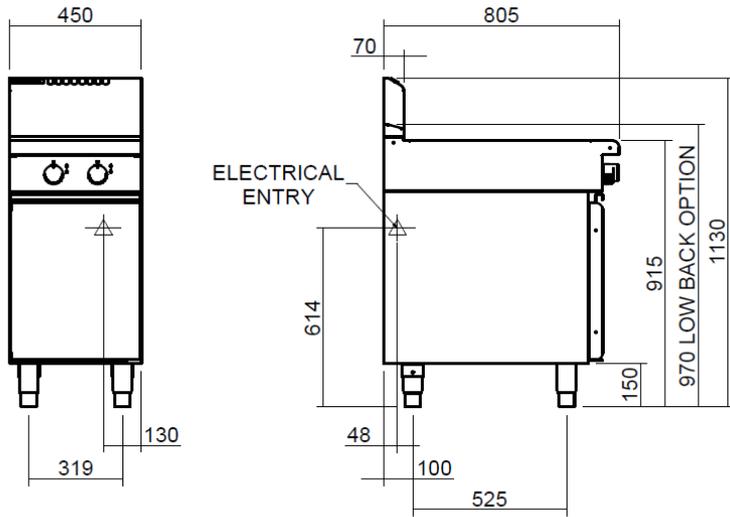

IN(L)8400E

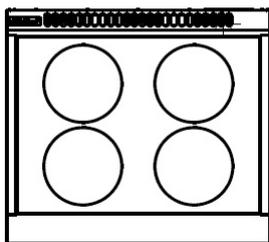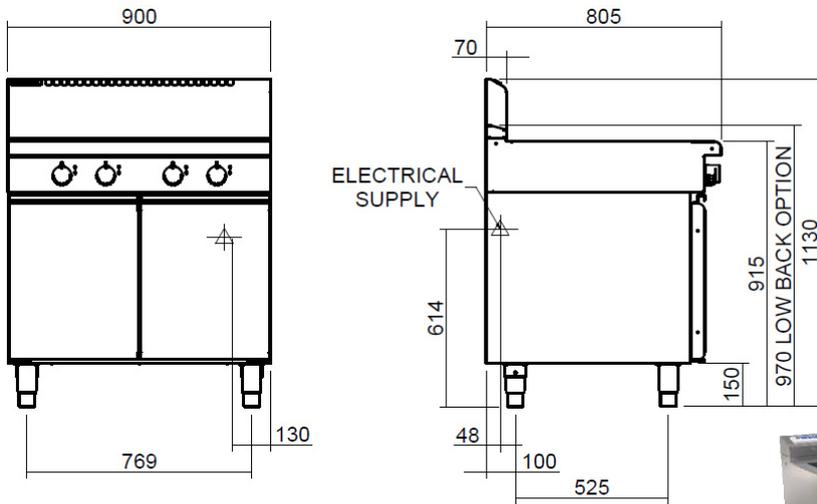

Installation Requirements

NOTE:

- **It is most important that this Induction Cooktop is installed correctly and that operation is correct before use. Installation shall comply with local electrical and health and safety requirements.**

Waldorf Induction Cooktops are designed to provide years of satisfactory service, and correct installation is essential to achieve the best performance, efficiency and trouble-free operation.

This appliance must be installed in accordance with National installation codes and in addition, in accordance with relevant National / Local codes covering gas and fire safety.

Australia / New Zealand	AS/NZS 3000	- Wiring Rules.
United Kingdom:	BS 7671	- Requirements for Electrical Installations.

Installations must be carried out by qualified persons only. Failure to install equipment to the relevant codes and manufacturer's specifications shown in this section will void the warranty.

Components having adjustments protected (e.g. paint sealed) by manufacturer, are only to be adjusted by an authorised service agent. They are not to be adjusted by the installation person.

Unpacking

- Remove all packaging and transit protection from the appliance including all protective plastic coating from the exterior stainless steel panels.
- Check equipment and parts for damage. Report any damage immediately to the carrier and distributor.
- Report any deficiencies to the distributor who supplied the appliance.
- Check that the available electrical supply is correct to that shown on the Rating Plate attached to the underside of the R/H side, front Induction Cooktop lower trim.

Location

1. Installation must include adequate clearance and ventilation.
2. Position the appliance in its approximate working position.
3. The legs must always be fitted. Ensure that the legs are securely attached.

Clearances

	Combustible Surface	Non Combustible Surface
Left / Right Hand Side	50mm	0mm
Rear	50mm	0mm

NOTE: Only non-combustible materials can be used in close proximity to this appliance.

Installation

Assembly

This model is delivered completely assembled. Ensure that the adjustable feet are securely attached.

CAUTION:

- **This appliance is for professional use and is only to be used by qualified persons.**
- **Only qualified service persons are to carry out installation and servicing of this appliance.**

NOTE:

- **This appliance is fitted with adjustable feet to enable the appliance to be positioned securely and level. This should be carried out on completion of the electrical connection.**
- **Rear Roller Kit - For installation details, refer to the instructions supplied with the kit.**

Electrical Connection

WARNING:

THIS APPLIANCE MUST BE EARTHED. IF THE SUPPLY CORD IS DAMAGED, IT MUST BE REPLACED BY A SUITABLY QUALIFIED PERSON IN ORDER TO AVOID A HAZARD.

NOTE: ALL ELECTRICAL CONNECTIONS MUST ONLY BE CARRIED OUT BY A QUALIFIED SERVICE PERSON.

Each appliance should be connected to an adequately protected power supply and isolation switch mounted adjacent to, but not behind the appliance. This switch must be clearly marked and readily accessible in case of fire.

1. Check that the electricity supply is correct as shown on the Rating Plate. Refer to the 'Dimensions Section' for rating plate locations for the different model types.
2. The supply terminal connections are located at the rear of the the appliance. Refer to 'Electrical Connections' in the 'Specifications' section of the manual.
3. Bring the supply cable up through the compression type gland provided on the rear of the main electrical switchgear panel.
4. Connect the mains supply to L1, L2 and L3 connections as required. Refer to the 'Electrical Supply Requirements' section.
5. Connect earth conductors to earth stud.
6. For all connections ensure that conductors are secure and appropriately terminated.
7. Tighten the cable gland to secure against tension on the cable.

NOTE:

- **This appliance must be earthed.**
 - **Fixed wiring installations must incorporate an all-pole disconnection switch.**
8. Correctly locate the appliance into its final operating position and using a spirit level, adjust the legs so that the appliance is level and at the correct height.
 9. Connect the power supply to the appliance.
 10. Check that the electrical supply is as shown in 'Specifications' section.

Commissioning

The following commissioning checks must be carried out before the Induction Cooktop is handed over for use, to ensure that the unit operates correctly and the operator(s) understand the correct operating procedure.

1. Before leaving the new installation, check the following functions in accordance with the operating instructions specified in the 'Operation' section of this manual.
 - Check the current draw and loading for the equipment. Refer specification section for correct electrical requirements.
 - Check that all the connections are correct and that all cover panels have been re-fitted.
 - After everything is connected, perform the following function check:-
 - a. Ensure that any cooking pots are removed from the cooking zone.
 - b. Adjust the cooking level to 'Zero'.
 - c. Switch 'On' the mains supply.
 - d. The Green and Red Indicator lamps must not illuminate or flash.
 - e. Increase the cooking level to any number.
 - f. The Green Indicator lamp must blink regularly every second (Pan Detecting Mode). On the display, Pan Detection Symbol **U** must blink (Pan Detecting Mode).
 - g. No Fault must occur. Red Indicator lamp must not illuminate.
 - h. Place a water filled induction pan (minimum of 120 mm diameter) on the cooking zone.
 - i. The Green Indicator lamp must be 'On' continuously.
 - j. Adjust power to Maximum.
 - k. After a few seconds, the fan must turn 'On'.

WARNING:

DO NOT HEAT EMPTY PANS WITHOUT SUPERVISION. ALWAYS PLACE PANS IN THE CENTRE OF AN INDUCTOR ZONE. PANS SHOULD NOT BE HEATED UP TO MORE THAN 300°C (570°F).

- If an error occurs, refer to the 'Fault Finding' section of this manual.
 - Ensure that this instruction manual is left with the appliance.
 - Ensure that all the relevant details and contacts have been added to the front of this manual.
2. Ensure that the operator has been instructed in the areas of correct operation and shutdown procedure for the appliance.
 3. This manual must be kept by the owner for future reference and as a record of *Date of Purchase*, *Date of Installation* and *Serial Number of Unit* recorded and kept with this manual. (These details can be found on the Rating Plate attached to the inner R/H side panel. Refer to the 'Dimensions' section for rating plate location).

NOTE:

- If for some reason it is not possible to get the unit to operate correctly, turn off the electrical power supply and contact a qualified service person. The supplier of this unit will be able to recommend a suitable person.
- Make sure that the electrical supply is turned off before any service or maintenance work is carried out.

Operation

Operation Guide


CAUTION:

- This appliance is for professional use and is only to be used by qualified persons.
- Only qualified service persons are to carry out installation and servicing operations.
- Components having adjustments protected (e.g. paint sealed) by the manufacturer should not be adjusted by the user / operator.

1. Waldorf appliances have been designed to provide simplicity of operation.
2. Improper operation is therefore almost impossible, however bad operation practices can reduce the life of the appliance and produce a poor quality product. To use this appliance correctly please read the following sections carefully.

Description of Controls

(Model IN8200E Shown)

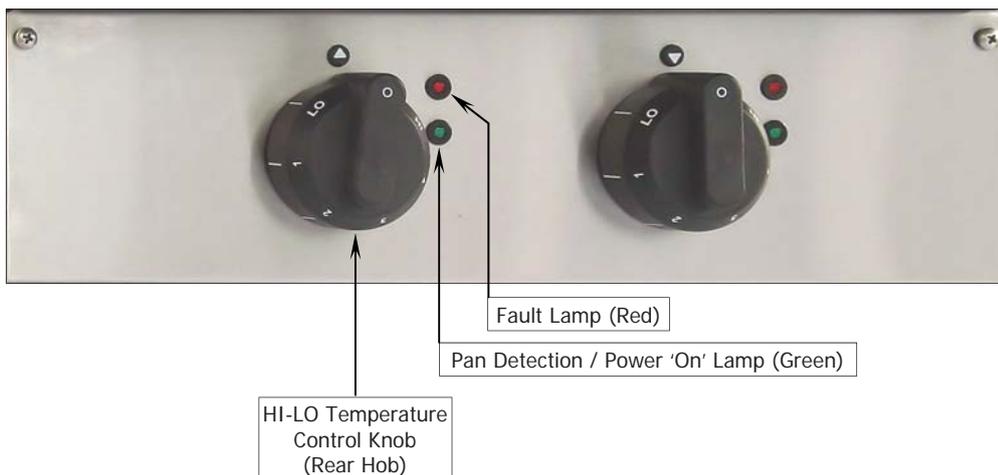

HI / LO Temperature Control Knob

Used to select hob required and to adjust the temperature setting for individual Hobs.

Pan Detection / Power 'On' Lamp (Green)

Illuminates and remains 'On' when a selected hob is turned 'On' and has a pan on the hob.

If the hob is turned 'On' without a pan on the hob, the lamp will commence flashing until a pan is placed on the selected hob.

Also used with the 'Fault Lamp' to display Generator Faults, refer to 'Error Code Pattern' in the 'Fault Finding' section.

Fault Lamp (Red)

Illuminates and remains 'On' when a fault is detected. The red fault lamp will remain 'On' until the fault is rectified. Refer to 'Error Code Pattern' in the 'Fault Finding' section.

Operating the Cooktop

WARNING:

INDUCTION HEAT SOURCE - CARE MUST BE TAKEN TO ENSURE THAT THE SPLASHBACK AND SURROUNDING AREAS ARE KEPT FREE OF METALLIC OBJECTS.

Before Operating this Appliance Please Note the Following Points:-

- **Metallic objects such as kitchen utensils, cutlery etc. shall not be placed on the Cooktop surface within the cooking zones as they could become hot.**
- **Take care when operating the appliance, as rings, watches and similar objects worn by the user could get hot when in close proximity to the Cooktop surface.**
- **Only use pans of the type and size recommended by the manufacturer.**

NOTE: Users with Heart Pacemakers fitted should consult with their doctor or the manufacturer before using this appliance.

The controls for the hobs may be set at any position between high and low to provide the desired level of heating. An individual green neon for each hob, will glow when the hob is 'On' with a pan present and extinguish when the hob is turned 'Off'.

Start cooking at the highest setting, and change to a lower setting when the desired temperature is reached.

1. Turn power 'On' at the mains power supply.
2. Place cooking pan onto the hob to be used, ensuring that there is liquid in the pan.
3. Turn the control knob to the desired temperature. The 'Green' indicator lamp will illuminate and stay 'On'.

NOTE: If the control knob is turned 'On' without a pan being on the hob, the green indicator lamp will commence flashing until a pan is placed on the hob.

4. On completion of cooking, turn 'Off' the control knob and remove the pan, the green indicator light will extinguish.

NOTE: If the Red 'Fault Lamp' Illuminates and remains 'On', a fault has been detected. The red fault lamp will remain 'On' until the fault is rectified. The Green indicator light will commence flashing. Refer to 'Error Code Pattern' in the 'Fault Finding' section. DO NOT use the appliance until the fault is rectified.

Cleaning and Maintenance

CAUTION:

**Always turn off the electrical power supply at the mains supply before cleaning.
This appliance is not water proof.
Do not use water jet spray to clean interior or exterior of this appliance.**

General

Clean the Induction Cooktop regularly. A clean appliance looks better, will last longer and will perform better. Carbonised grease on the surface will hinder the transfer of heat from the cooking surface to the food. This will result in loss of cooking efficiency.

DO NOT use water on the induction hob while this item is still hot as warping and cracking may occur. Allow the hob to cool down before cleaning.

NOTE:

- **DO NOT use abrasive detergents, strong solvents or caustic detergents as they could corrode or damage the induction hob.**

To keep your Induction Cooktop clean and operating at peak efficiency, follow the procedures shown below:-

After Each Use

1. Clean the Induction Cooktop hob area with a plastic or wooden scraper tool to remove any food debris.
2. Wipe down with a damp cloth lightly moistened with a solution of mild detergent and water. Dry the Cooktop hob area thoroughly with a dry cloth and polish with a soft dry cloth.

Daily Cleaning

1. Thoroughly clean the splash back, the interior and exterior surfaces of the Induction Cooktop with hot water, a detergent solution and a soft scrubbing brush.
2. Clean the Control Panel with a damp cloth lightly moistened with a solution of mild detergent and water. Dry the control panel thoroughly with a dry cloth and polish with a soft dry cloth.
3. Any carbon deposits should be removed using a plastic or wooden scraper tool followed by wiping with a cloth moistened in a solution of hot water and detergent to prevent accumulation of food deposits.
4. Dry the Induction Cooktop thoroughly with a dry cloth and polish with a soft dry cloth.

Weekly Cleaning

NOTE:

- If the Induction Cooktop usage is very high, we recommend that the weekly cleaning procedure is carried out on a more frequent basis.
- Ensure that protective gloves are worn during the cleaning process.
- DO NOT use harsh abrasive detergents, strong solvents or caustic detergents as they will damage the Induction Cooktop.

Induction Cooktop Cooking Area

- a. Clean the Induction Cooktop area with a soft cloth and a mild detergent and hot water solution.
- b. Baked on deposits may require the use of a plastic or wooden scraper and a good quality glass cleaner. Always apply cleaner when the appliance is cold.

Stainless Steel Surfaces

- a. Clean the exterior surfaces of the Induction Cooktop with hot water, a mild detergent solution and a soft scrubbing brush. Note that the control knobs are a push fit onto the control spindles and can be removed to allow cleaning of the front control panel.
- b. Baked on deposits or discolouration may require a good quality stainless steel cleaner or stainless steel wool. Always apply cleaner when the appliance is cold and rub in the direction of the grain.
- c. Dry all components thoroughly with a dry cloth and polish with a soft dry cloth.

Monthly Filter Cleaning

NOTE: If the Induction Cooktop usage is very high, we recommend that the grease filter monthly cleaning procedure is carried out on a more frequent basis.

Once a month, the grease filter should be removed and cleaned.

- a. Open the Induction Cooktop door and remove the securing screws. Remove the filter.
- b. Grease Filters can be cleaned by immersing in detergent and hot water and finally rinsing in hot water.
- c. Allow the grease filter to dry before re-fitting.



Periodic Maintenance

To achieve the best results, cleaning must be regular and thorough and all controls and mechanical parts checked and adjusted periodically by a competent serviceman. If any small faults occur, have them attended to promptly. Don't wait until they cause a complete breakdown.

It is recommended that the appliance is serviced every 6 months.

This section provides an easy reference guide to the more common problems that may occur during the operation of your appliance. The fault finding guide in this section is intended to help you correct, or at least accurately diagnose problems with your equipment.

Although this section covers the most common problems reported, you may encounter a problem not covered in this section. In such instances, please contact your local authorised service agent who will make every effort to help you identify and resolve the problem. Please note that the service agent will require the following information:-

- **The Model Trade Name and the Serial Number of the Appliance. (both can be found on the Technical Data Plate located on the appliance.**

Fault	Possible Cause	Remedy
Insufficient heating of the cooking zone.	Unsuitable pan material.	Use only approved pans.
Continuous heating of the cooking zone at maximum power.	Knob switch faulty.	Check / Replace the knob switch. Call the service provider.
Empty cooking zone starts operating.	Pan detection sensor faulty.	Replace / repair generator. Call the service provider.
Small metal objects are heated.	Pan detection sensor faulty.	Replace / repair generator. Call the service provider.
No heating of cooking zone.	Pan bottom diameter is less than 120 mm.	Use suitable pan size.
	Generator defective.	Replace / repair generator. Call the service provider.
Appliance not working.	Mains fuse or supply interrupted.	Check fuses / mains connection.
Fuses blow when switching 'on' appliance.	Short circuit in generator.	Replace / repair generator. Call the service provider.


Error Code Pattern

There are the following error types:-

- Generator Errors (E1).

Generator Errors - are faults detected by the generator and on analogue controls, the faults can be detected according to the duration and frequency of the green light blinking. The green lamp lights, one long flash and then short regular flashes. The number of these short flashes refers to the error number. This pattern will repeat constantly.

For example: error code E1 06 from the generator:

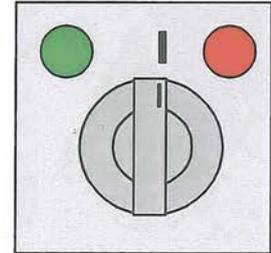

The red fault lamp remains on as long as an error exists.



Generator Fault Messages (E1)

Error No.	Type of Error	Cause	Corrective Action
E1 ↔ 01	Hardware over-current	Unsuitable pan material	Use suitable pan material
		Wrong or defective coil	Check Coil
E1 ↔ 02	No inductor current	Inductor connection failure	Connect the Inductor correctly
E1 ↔ 03	IGBT Temperature too high	Air routes blocked Fan clogged Temperature sensor of IGBT defective	Clear air routes Check fan and clean Check fan rotation
E1 ↔ 04	Cooking zone temperature too high or too low	Pan empty	Remove pan, switch 'Off' and wait a few minutes until cooking field has cooled down
		Temperature Sensor faulty	Replace Temperature Sensor
		Power Board faulty	Replace Generator
E1 ↔ 05	Control Unit failure	Defective wiring or Control Unit	Check wiring harness to unit, or replace Control Unit
		Control Unit faulty	Replace the Control Unit
E1 ↔ 06	Internal temperature too high	Air routes blocked Fan clogged, temperature sensor defect Exterior heat sources too close	Clear air routes Clean fan Move appliance or heat sources
E1 ↔ 07	Coil temperature	Coil temperature too high	Remove pan, switch 'Off' and wait a few minutes until cooking field has cooled down
		Temperature Sensor faulty	Replace Temperature Sensor
E1 ↔ 08	Mains phase failure	Breakdown of mains phase or mains power fluctuation	Check mains supply
E1 ↔ 13	Mains connection error	Mains voltage is too high or too low	Check mains connection
E1 ↔ 14	Mains adaptor error	Mains voltage is too high or too low	Check mains connection
E1 ↔ 15	Empty pan protection	Mains error	Switch 'Off' the main power switch and wait a few seconds and switch power back 'On'
		Empty pan	Remove pan, switch 'Off' and wait a few minutes until cooking field has cooled down
		Defective Coil Temperature Sensor	Replace Coil Temperature Sensor

Replacement Parts List

Replacement Parts List

IMPORTANT:

Only genuine authorized replacement parts should be used for the servicing and repair of this appliance. The instructions supplied with the parts should be followed when replacing components.

For further information and servicing instructions, contact your nearest authorized service branch (contact details are as shown on the reverse of the front cover of this manual).

When ordering replacement parts, please quote the part number and the description as listed below. If the part required is not listed below, request the part by description and quote model number and serial number which is shown on the rating plate.

233706	Induction Glass 450.
233705	Induction Glass 900.
234480	Induction Generator Vario Quad - 2 Tray.
234481	Induction Generator Vario Quad - 4 Tray.
234482	Induction Coil Tray 2 Zone.
234693	Induction Control Rotary Switch Assembly (Includes LED's).
235309	Potentiometer with Switch.
227398	Knob Waldorf 6 mm, HI-4-3-2-1-LO.
020774	Microswitch.
227850	Leg 150 mm (Flush Stud).
229674	Rear Roller Assy.
235137	Induction Air Filter.
235351	Thumb Screw (for Filter).
227856	Magnetic Door Catch.
235308	LED Red.
235307	LED Green.

