

Technical data sheet for

E32T4 OVEN / VH32 VENTLESS HOOD ON THE SK32 STAND

Full Size Electric Convection Oven TOUCH SCREEN CONTROL with
Halton Ventless Condensing Hood on a Stainless Steel Stand



E32T4

Unit shall be a Moffat electrically heated Turbofan Convection Oven. The oven shall have a one piece vitreous enamel oven chamber, stainless top and sides and safe touch vented easy clean side hinged door that offers field reversible hinging. Oven shall have capacity for four full size sheet pans. The oven shall have selectable moisture level injection and a 2 speed oven fan. The oven shall be controlled by a 5.7" Touch Screen control with manual and recipe operating modes with icon driven recipe programs and individual shelf control operation mode and multiple stage cooking. Oven controller shall have USB port for recipe file uploading and downloading. A core temperature probe M236060 is optional. The unit shall include dual halogen oven lamps. Oven shall be able to be bench mounted on 76mm feet or mounted on oven stand model SK32. Unit shall be supplied in 100% recyclable shipping packaging. This unit shall be Energy Star certified.

SK32

Unit shall be a Moffat Turbofan stainless steel oven stand. The stand shall be constructed from stainless steel tube with castors, with front castors having dual swivel and wheel locks. It shall be fitted with 6 tray runners suitable for up to 12 half size sheet pans or 6 full size sheet pans. The stand shall be fully compatible with and support Turbofan Convection Oven models E32D and G32D. Unit shall be supplied in 100% recyclable shipping packaging.

STANDARD FEATURES

- 4 460mm x 660mm / 18" x 26" full size sheet pan capacity
- 4 400mm x 600mm tray capacity
- 110mm tray spacing
- Compact 735mm width
- Touch Screen control
- USB port for programs
- Icon driven program menu
- Core Probe program cooking (optional Core Probe Kit)
- Moisture injection mode (5 levels) and manual injection
- 2 speed bi-directional reversing fan system
- 6.3kW heating power
- Safe-Touch vented side hinged door
- Vitreous enameled oven chamber

STANDARD FEATURES – VENTLESS CONDENSATION HOOD

- Removes need for installation under canopy or ducted oven hood
- Complies with EPA202 test method for less than <5mg/m³ grease laden effluent limits
- 3 stage filtering including charcoal odour filter
- Condensing heat exchanger for oven vent condensing and reduced heat emissions
- Self contained condensate collection – no connection to waste drain required
- Oven Hood interlock control
- Automatic 2 speed extraction fans - reduced noise/energy
- SEED certified for installation without an extraction canopy in most situations

VHIK32 INSTALLATION KIT

- Supplied standard with Hood
- Requires mechanical and electrical field assembly for connection of Hood to Oven

ACCESSORIES

- Optional M236060 Core Temperature Probe Kit
- Turbofan SK32 Oven Stand
- #H11715 Replacement Charcoal Filter for VH32

VH32

Unit shall be a Halton Ventless Condensing Hood, UL listed and UL EPH classified. The unit shall have all stainless steel construction, include 3 stage filtration and incorporate a condensing heat exchanger. Unit will feature an automatic 2 speed extraction fan with interlocked oven operation, Unit shall be 220-240V and fitted with a 10A plug cordset. Unit shall be provided with VHIK32 Installation Kit for connection and fitment to Moffat Turbofan Convection Oven models E32D4, E32D5, E32T4, E32T5.

VHIK32 Installation Kit

Installation Kit shall be provided with VH32 Ventless Condensing Hood. Installation kit shall include: Wire harness for oven interlock connection to oven controls. Four 100mm oven feet and condensate collection pan and housing for self-contained condensate collection. Oven rear shroud for protection of interlock control harness and condensate drain tube. Oven to stand rear securing plate when oven is fitted on a Moffat Turbofan SK32 Stand.

Halton VH Series Ventless Condensing Hoods are manufactured by Halton Company, USA, exclusively for Moffat Turbofan Convection Ovens.

E32T4 Full Size Electric Convection Oven TOUCH SCREEN CONTROL

CONTROLS

5.7" LED backlit touch screen
 Icon driven program menu
 BMP image icon imports via USB port
 Program updates via USB port
 Temperature range 30 - 260°C
 Adjustable sounder tones and volume
 Safety thermostat cut-out
 Optional core temp probe

SPECIFICATIONS

Electrical Requirements
 230-240V, 50Hz, 1P+N+E, 6.5kW, 27A
 No cordset supplied

Water Requirements (optional)

Cold water connection 3/4" BSP male
 80psi maximum inlet pressure / 20psi minimum inlet pressure

External Dimensions (E32T4)

Width 735mm
 Height 730mm including 76mm feet
 Depth 810mm

Oven Rack Dimensions

Width 460mm
 Depth 660mm

Nett Weight (E32T4)

89kg

Packing Data (E32T4)

105kg
 0.57m³
 Width 760mm
 Height 815mm
 Depth 925mm

VH32 Ventless Condensing Hood

Including VHIK32 Installation Kit

CONTROLS

Illuminated Power switch
 Oven interlocked control

SPECIFICATIONS

Electrical Requirements
 220-240V, 50-60hz, 1-phase, 1.0A
 10A plug 1.8M cordset fitted

Water Requirements

No water connection required

Drain Requirements – Optional

Hood water condensate can be taken to a water waste drain if desired. A 1800mm long 3/8" OD drain hose is supplied with hood.

External Dimensions (VH32 Ventless Hood)

Width: 742mm
 Height: 368mm
 Depth: 1017mm
 Allow 76mm rear clearance

Nett Weight (VH32 Ventless Hood)

46.5 kg

Packing Data (VH32 Ventless Hood)

57 kg
 0.7 m³
 Width 800mm
 Height 545mm
 Depth 1120mm

SK32 Stainless Steel Stand

All stainless steel welded frame oven stand for Turbofan E32D,

E32T and G32D Series ovens

6 position tray runners standard

76mm diameter wheel swivel castors standard with 2 front castors

with dual swivel and wheel

Supplied CKD for assembly on site

External Dimensions (SK32 Oven Stand)

Width 735mm
 Height 880mm
 Depth 827mm

Nett Weight (SK32 Oven Stand)

18.5kg

Packing Data (SK32 Oven Stand)

23kg
 0.14m³
 Width 840mm
 Height 805mm
 Depth 210mm

INSTALLATION CLEARANCES

Rear 50mm
 LH Side 50mm
 RH Side* 75mm

* For fixed installations a minimum of 500mm is required for service

CLEARANCE FROM SOURCES OF HEAT

A minimum distance of 300mm from the appliance sides is required



Australia

www.moffat.com.au

New Zealand

www.moffat.co.nz

www.turbofanoven.com

Australia

Moffat Pty Limited

Victoria/Tasmania

740 Springvale Road

Mulgrave, Victoria 3170

Telephone +61 3-9518 3888

Facsimile +61 3-9518 3833

vsales@moffat.com.au

New South Wales

Telephone +61 2-8833 4111

nswsales@moffat.com.au

South Australia

Telephone +61 3-9518 3888

vsales@moffat.com.au

Queensland

Telephone +61 7-3630 8600

qldsales@moffat.com.au

Western Australia

Telephone +61 8-9413 2400

wasales@moffat.com.au

New Zealand

Moffat Limited

Christchurch

45 Illinois Drive

Izone Business Hub

Rolleston 7675

Telephone +64 3-983 6600


Facsimile +64 3-983 6660

sales@moffat.co.nz

Auckland

Telephone +64 9-574 3150

sales@moffat.co.nz

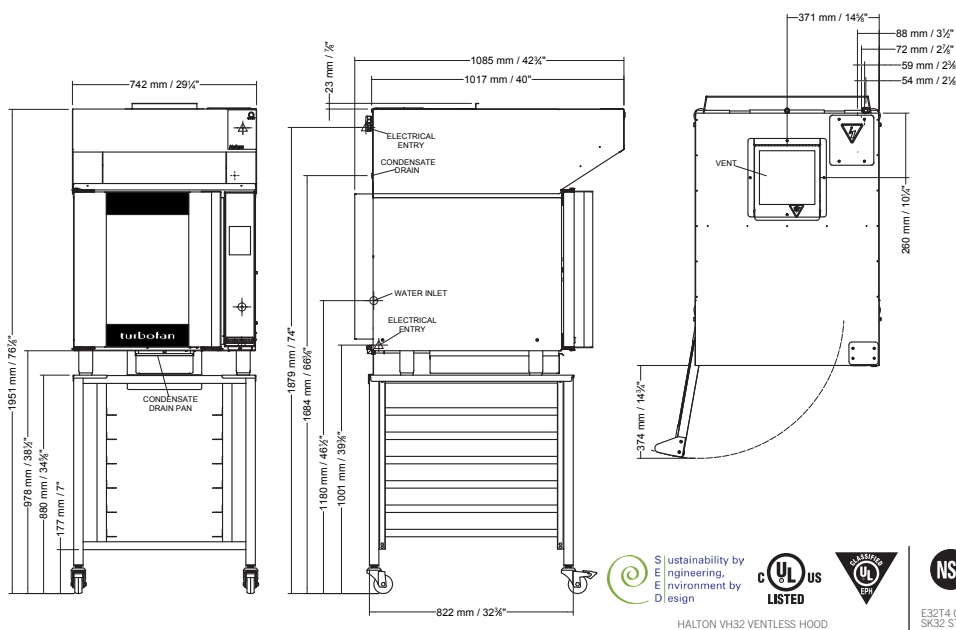

ISO9001
 All Turbofan products are designed and manufactured by Moffat using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd
 AN.TFN.S.2201



an Ali Group Company



The Spirit of Excellence