

Technical data sheet for

## EC40T5 ON THE SK40A STAND

Full Size 5 Tray Touch Electric Combi Oven on a Stainless Steel Stand



### EC40T5

Unit shall be a Moffat electrically heated Turbofan direct steam injection combination convection steam oven. The oven shall have a stainless steel oven chamber with 5 x 1/1 GN capacity, 7.25 kW power rating and a 2 speed auto-reversing direction fan. Oven door shall be vented, safe to touch and feature LED oven chamber lighting. Automatic one touch display that can be configured based on the needs of the user that provide convection, steam, and combi cooking mode selection. Oven shall be able to be bench mounted on 100mm feet or mounted on Turbofan oven stand model SK40A. Unit shall be supplied in 100% recyclable shipping packaging.

### SK40A

Unit shall be a Moffat Turbofan stainless steel oven stand. The stand shall be constructed from stainless steel tube with 4 adjustable feet. It shall be fitted with 6 tray runners suitable for 1/1 GN pans and 600 x 400 trays. The stand shall be fully compatible with, and support, Turbofan Combi Oven EC405 and EC407 models. Unit shall be supplied in 100% recyclable shipping packaging

### STANDARD FEATURES

- Electric direct steam version
- 5 x 1/1 GN tray capacity
- 5 x 600mm x 400mm tray capacity
- 70mm tray spacing
- Compact 777mm wide
- 7.25kW heating power
- 2 speed fan
- Manual cooking with three cooking modes – Convection (30°C-260°C), Steam (30°C-130°C), Combi (30°C-260°C)
- Autoclima® system that automatically manages the perfect climate in the cooking chamber
- MULTILEVEL PLUS - multi-level function on each shelf means doubling production capacity (patented)
- High-definition 7-inch capacitive LCD colour touch screen function – configurable based on user preferences
- Programmable modes: create and save a recipe with its cooking methods in an automatic sequence (up to 15 cycles) giving each programme its own name, picture and information
- Intelligent recognition of recipes in multilevel folders
- ICS (Interactive Cooking System), an automatic cooking system for preset recipes including their history, ingredients, cooking accessory, procedure, automatic cooking programme and picture
- Automatic one touch cooking (ICS)
- Auto reverse (automatic inversion of the direction of the fan) for perfectly uniform cooking
- ECOVAPOR – automatic control of the steam saturation in the cooking chamber
- ECOSPEED – oven optimises and controls the delivery of energy to maintain correct cooking temperature
- Core temperature probe
- Automatic cleaning system LCS (Liquid Clean System) with built-in tank and automatic dispensing
- USB connection to download HACCP data, software update and cooking programme management
- Wi-Fi connectivity
- Low consumption LED cooking chamber lighting
- Self-diagnostic with smart error viewing
- Door with rear ventilation, double tempered glass front with air chamber and interior heat-reflecting glass
- Internal glass that folds for easy cleaning
- Cooking chamber in 1mm thick AISI 304 stainless steel with fully rounded edges for best airflow and easy cleaning
- Triple action water filter cartridge and filter head included

### ACCESSORIES

- Turbofan SK40A oven stand
- Externally fitted hand shower
- Extraction hood
- Bakery side racks - must specify at time of order

### EC40T5 Full Size 5 Tray Touch / Electric Combi Oven

Dimensions	
Width	777mm
Depth	744mm
Height	723mm
Weight	74kg

Packed Dimensions	
Width	910mm
Depth	865mm
Height	900mm
Weight	85kg
Volume	0.42 m <sup>3</sup>

Shelves	
1/1 GN	5
Shelf Spacings	70mm

**Power connection requirements**  
Multi pole circuit breaker and all pole disconnection isolator switch installed near the appliance.

**Electrical requirements**  
400-415V, 50Hz, 3P+N+E, 7.25kW, 11A  
230-240V, 50Hz, 1P+N+E, 7.25kW, 32A

**Water connection requirements**  
**Water Supply**  
2 x R3/4 connections  
Cold Water (Softened water optional)  
Flow pressure 200-500 kPa  
Shut off valve with back flow prevention

**Water Quality**  
total hardness 60-90 ppm  
pH > 7.5  
Cl-(chloride) max. 30 mg/l  
Cl2 (free chlorine) max. 0.1 mg/l  
Fe (iron) max. 0.1 mg/l  
NH2Cl (monochloramine) max. 0.2 mg/l  
cold water temperature max. 30° C  
Electrical conductivity 50 - 200 uS

**Drain**  
- Funnel waste trap/turndish required  
- 40 mm outlet  
- Minimum fall/slope for waste 4°  
- Drain must be outside oven perimeter

### SK40A Stainless Steel Stand

All stainless steel welded frame oven stand for Turbofan EC40 5 tray and 7 tray Series Combi ovens  
6 position tray runners  
4 height adjustable feet  
Supplied CKD for assembly on site

<b>External Dimensions (SK40A Oven Stand)</b>	
Width	810mm
Depth	650mm
Height	854mm
Weight	19kg

<b>Packing Data (SK40A Oven Stand)</b>	
Weight	22kg
Volume	0.11m <sup>3</sup>
Width	830mm
Depth	160mm
Height	880mm

### INSTALLATION CLEARANCES

Installation requirements (for precise installation instructions, please refer to the unit's installation manual).

- rear	50mm
- right	50mm*
- left	50mm*

\* A minimum of 500mm clearance must be maintained on one of the sides for servicing.

The unit cannot be installed in a recess.

If heat sources are located near the Turbofan Combi, ensure that a minimum distance of 400mm is maintained. Install in accordance with local body regulations only on horizontal surfaces and not against combustible walls.



[moffat.com.au](http://moffat.com.au)  
[moffat.co.nz](http://moffat.co.nz)

**Australia**  
[moffat.com.au](http://moffat.com.au)  
Moffat Pty Limited  
Victoria/Tasmania  
740 Springvale Road  
Mulgrave, Victoria 3170  
Telephone +613-9518 3888  
Facsimile +613-9518 3833  
vsales@moffat.com.au

**New South Wales**  
Telephone +612-8833 4111  
nswsales@moffat.com.au


**South Australia**  
Telephone +613-9518 3888  
vsales@moffat.com.au

**Queensland**  
Telephone +617-3630 8600  
qldsales@moffat.com.au

**Western Australia**  
Telephone +618-9413 2400  
wasales@moffat.com.au

**New Zealand**  
[moffat.co.nz](http://moffat.co.nz)  
Moffat Limited  
Rolleston  
45 Illinois Drive  
Izone Business Hub  
Rolleston 7675  
Telephone +64 3-983 6600  
Facsimile +64 3-983 6660  
sales@moffat.co.nz

**Auckland**  
Telephone +64 9-574 3150  
sales@moffat.co.nz

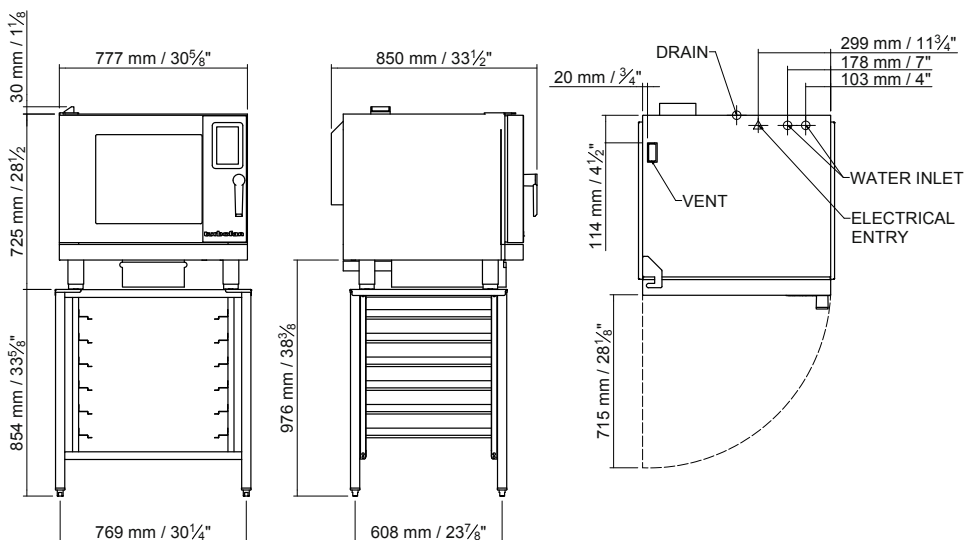

© Copyright Moffat Ltd  
AN.TC.01.25