



# WD-90DUO **EFFICIENT COMBINATION DISHWASHER**

### STANDARD FEATURES:

- Automatic hood lift
- 0.74kW wash pump
- 9kW booster heater
- 90 litres wash tank volume
- Eve level control
- User friendly panel with 9 programs
- High capacity 6 x 1/1 pans per cycle on a rotating rack
- Fast spin drying action fixed wash arms
- Flexibility can be used with or without granules
- 670mm high clearance
- Low water consumption 5 litres per cycle
- Steam is directed on opening upwards behind the machine
- Includes 3 dishwashing baskets & 1 round post washing cassette

Upgrades and options are available, please contact Moffat for more details

## TECHNICAL INFORMATION:

## **Dimensions**

Width: 850mm 998mm Depth: Height: 1719mm

#### Water

Hot water temperature: 50-70°C Hot water connection: R 3/4" Hot water pressure: 100-600kPa Cold water temperature: 5-12°C Cold water connection: R 3/4" Cold water pressure: 300kPa

Flow: 30 litres per minute Water quality (Hardness): 2-7odH

#### Waste


Connection: 50mm dia direct


## Electrical

3P+N+E 400-415V 50/60Hz 11.7kW 20A

Refer operator manual for complete installation instructions



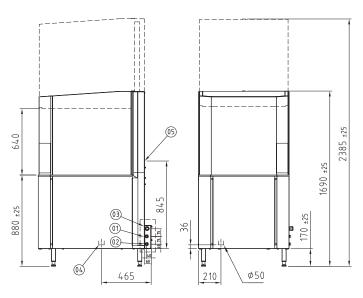



01. COLD WATER CONNECTION 02. HOT WATER CONNECTION 03. ELECTRICAL CONNECTION

05. DETERGENT CONNECTION

## Australia moffat.com.au

Moffat Pty Limited 740 Springvale Road Mulgrave Victoria 3170 Australia Telephone +613-9518 3888 Facsimile +613-9518 3833 vsales@moffat.com.au

## New Zealand moffat.co.nz

Moffat Limited 45 Illinois Drive Izone Business Hub Rolleston 7675 New Zealand Telephone +64 3-983 6600 Facsimile +64 3-983 6660 sales@moffat.co.nz

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd AN.WDK.SS.1701





